

White Oak 15mm Engineered UV Lacquered Stock Code: E06

Bäusen[®]
PRE-FINISHED HARDWOOD FLOORING

Product Information

Grade-

Rustic (CD) - defects allowed, large knots filled. 100% of this grade allows living knots of 20mm and over. Colour variation unlimited, Knots putty filled before sanding and sealing.

Species-

White Oak

Third Party Accreditation

CE Mark / FSC Certified

Length

1900mm (2 split boards per pack)

Width

190mm

Thickness

15mm (4mm wear layer)

Pack Size

2.888m²

Profile

Micro bevel to all four sides/ tongue and grooved to all four sides

Moisture Content

8-12% Moisture content BS8201

Finish Treatment

UV Lacquered, Several coats of UV two component polyurethane lacquer silk.

Installation


Instructions please refer to - www.bausen.co.uk

Underfloor Heating

Suitable for use with underfloor heating providing Bausen fitting instructions and manufactures guidelines have been followed.

Maintenance

Cleaning – Tover Pulito (natural soap for wooden floors)

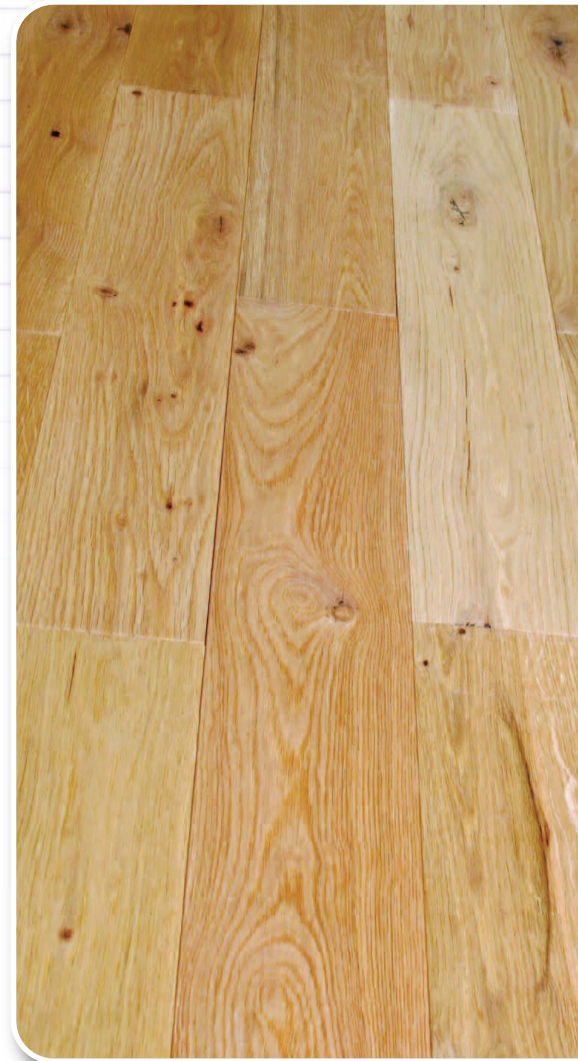

The mark of
responsible forestry