

# White Oak 18mm Engineered Lightly Brushed Super Matt Finish UV Lacquered Stock Code: E57

**Bäusen**<sup>®</sup>  
PRE-FINISHED HARDWOOD FLOORING

## Product Information

### Grade-

Nature (ABC) - defects allowed, large knots filled. 100% of this grade allows living knots of 20mm and over. Colour variation unlimited, Knots putty filled before sanding and sealing.

### Species-

American White Oak

### Third Party Accreditation

CE Mark / FSC Certified

### Length

Random Length (300-1500 average length 750mm)

### Width

135mm

### Thickness

18mm (4mm wear layer)

### Pack Size

2.376m<sup>2</sup>

### Profile

Micro bevel to all four sides/ tongue and grooved to all four sides

### Moisture Content

8-12% Moisture content BS8201

### Finish Treatment

UV Lacquered several coats of UV two component polyurethane lacquer Super Matt finish (Lightly Brushed).

### Installation


Instructions please refer to - [www.bausen.co.uk](http://www.bausen.co.uk)

### Underfloor Heating

Suitable for use with underfloor heating providing Bausen fitting instructions and manufactures guidelines have been followed.

### Maintenance

Cleaning – Tover Pulito (natural soap for wooden floors)

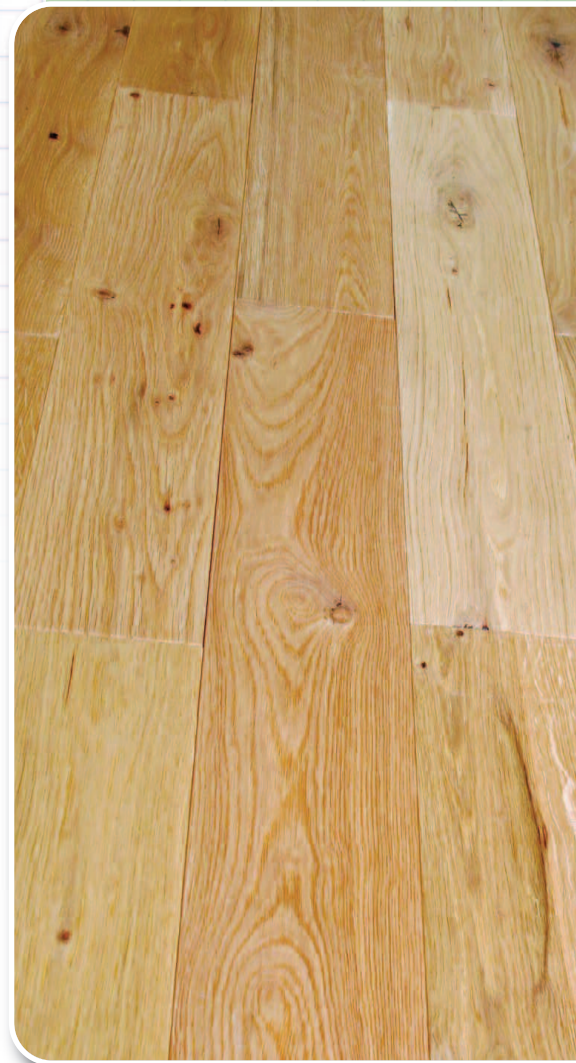

The mark of  
responsible forestry